


SLA BATTERIES

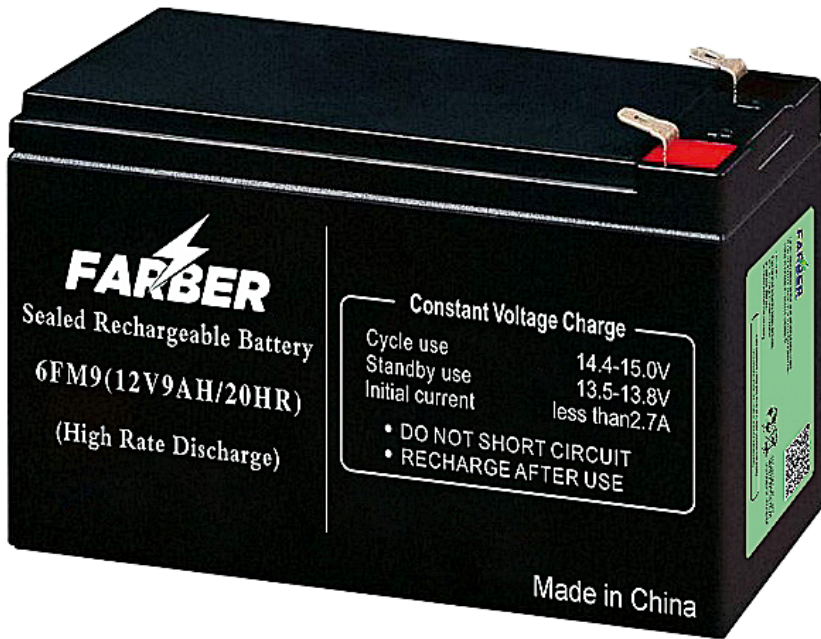

FEATURES

- ✓ Sealed maintenance free VRLA technology.
- ✓ AGM separator.
- ✓ Modular design with low foot print.
- ✓ Robust design with lip and tongue heat sealing for container integrity.

MAINTENANCE & CAUTIONS

Float Service:

- ✓ Every month, recommend inspection every battery voltage.
- ✓ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 14.4-14.7V charge 24h.

- ✓ Effect of temperature on float charge voltage: $-3\text{mV}/^\circ\text{C}/\text{Cell}$.
- ✓ Length of service life will be directly affected by the number of discharge
- ✓ Cycles, depth of discharge, ambient temperature and charging voltage.

APPLICATION



Telecom system



Fire & alarm system



Emergency system



Medical equipment



UPS/EPS

SPECIFICATION

MODEL	VOLTAGE (V)	CAPACITY (AH)	WEIGHT (KG)	DIMENSION IN MM (L x W x H)
FA-BATT-12V-7AH	12	7	1,97	151 x 650 x 935
FA-BATT-12V-9AH	12	9	2,57	151 x 650 x 111
FA-BATT-12V-12AH	12	12	3,38	151 x 980 x 950
FA-BATT-12V-18AH	12	18	5,35	181 x 770 x 167

FEATURES



Recycle



TEMPERATURE

Extreme Temperature caution



WARRANTY

Warranty 1 year



VENTILATION

Install the battery in a properly ventilated



CHARGING

After discharge, charge the battery immediately