




FEATURES

- ✔ Design Float life of 12+ years.
- ✔ Designed to perform in harsh tropical conditions.
- ✔ Front Terminal Batteries with Truly Front Access Terminals.
- ✔ Integral Dual handles for easy handling & installation.
- ✔ Suitable for standard 23" rack.
- ✔ Inbuilt facility for Central Degassing.
- ✔ High Volumetric Energy Density for maximum power in minimal foot print area.
- ✔ Short Recharge Time owing to Lower Internal resistance
- ✔ Patented Lead Oxide Paste Recipe offering excellent charge acceptance and low self-discharge rate.
- ✔ Innovative plate design offers low internal resistance and superior high rate discharge performance
- ✔ Advanced AGM separator offering a longer service life and enhanced high rate discharge performance
- ✔ Automated, state-of-the-art cast-on strap process ensures consistent, high-quality, low electrical resistance welds
- ✔ Automated InterCell Welding offering low Internal resistance
- ✔ Threaded Post Copper Insert Terminals offering high conductivity and torque retention
- ✔ Lip & Tongue type Heat Sealing to ensure a leak-proof seal

APPLICATION

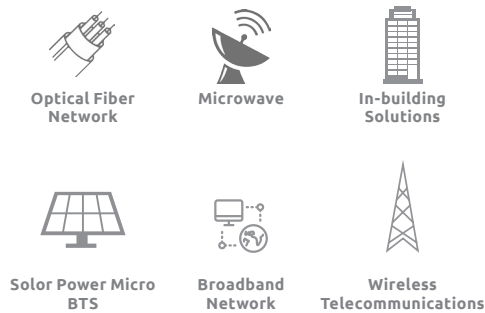

SPECIFICATION

MODEL	VOLTAGE (V)	CAPACITY (AH)	WEIGHT (KG)±5%	DIMENSION IN MM (L x W x H)	FLOAT VOLTAGE AT 27°C	BOOST VOLTAGE AT 27°C
FA-BATT-12V-100AHTe	12	100	36	123 x 556 x 224	13.5	13.8
FA-BATT-12V-125AHTe	12	125	43	123 x 556 x 257	13.5	13.8
FA-BATT-12V-150AHTe	12	150	52	123 x 556 x 296	13.5	13.8

FEATURES

Recycle	MAINTENANCE	TEMPERATURE	WARRANTY	VENTILATION	CHARGING	DESIGN	LIFE
	Maintenance Free	Extreme Temperature caution	Warranty 1 year	Install the battery in a properly ventilated	After discharge, charge the battery immediately	Unique Design	100% cyclic life after 500 cycles