

# 3PH HYBRID SOLAR INVERTER

(10KVA)



UPS


INVERTERS

ACCESSORIES

AVR

BATTERIES

SOLAR SOLUTION

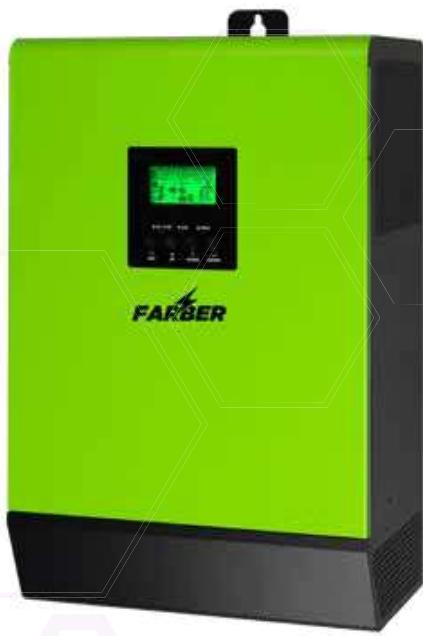

Parallel Operation  
up to 6 units



Self-consumption and  
feed-in to the grid



Programmable supply  
priority for PV, Battery

## BENEFITS

- Pure sine wave output
- Self-consumption and feed-in to the grid
- Programmable supply priority for PV, Battery or Grid
- User-adjustable charging current and voltage
- Programmable multiple operation modes: Grid-tie (with battery connected), off-grid and grid-tie with backup
- Built-in timer for various mode of on/off operation
- Multiple communication for USB, RS-232, Modbus and SNMP
- Monitoring software for real-time status display and control
- Parallel operation up to 6 units

## APPLICATION



Dishwasher




Communication center



AC-5 Ton



House Backup

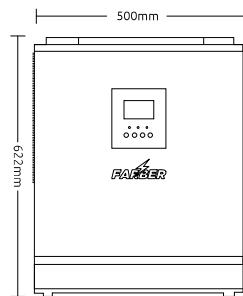

(10KVA)

## FEATURES



Pure sine wave output



Bi-direction concept



Separated to operate  
in different operation  
modes



Automatic load sharing  
on AC and DC output

# SPECIFICATION

MODEL NUMBER	FA-HINV-48V-10KVA
PHASE	3-phase in /3-phase out
Max. PV Array Power	14850W
Rated Output Power	10000W
Maximum Charging Power	9600W
Nominal DC Voltage/Max. DC Voltage	720 VDC/900 VDC
Start-up Voltage/Initial Feeding Voltage	320 VDC /350 VDC
MPP Voltage Range	400 VDC-800 VDC
Number of MPP Trackers/Maximum Input Current	2/2*18.6A
Nominal Output Voltage	230 VAC (P-N)/ 400 VAC (P-P)
Output Voltage Range	184-265 VAC* per phase
Nominal Output Current	14.5A per phase
Power Factor	> 0.99
Maximum Conversion Efficiency (DC/AC)	96%
European Efficiency@Vnominal	95%
AC start-up Voltage/Auto Restart Voltage	120-140 VAC per phase /180 VAC per phase
Acceptable Input Voltage Range	170-280 VAC per phase
Max. AC Input Current	40A
Max. DC Voltage	900 VDC
MPP Voltage Range	400 VDC - 800 VDC
Number of MPP Trackers/Max. Input Current	2/2*18.6A
BATTERY MODE OUTPUT (AC)	
Nominal Output Voltage	230 VAC (P-N)/400 VAC (P-P)
Output Waveform	Pure sine wave
Efficiency (DC to AC)	91%
HYBRID OPERATION	
Nominal DC Voltage/Max. DC Voltage	720 VDC/ 900 VDC
Start-up Voltage/Initial Feeding Voltage	320 VDC /350 VDC
MPP Voltage Range	400 VDC~800 VDC
Number of MPP Trackers/Max. Input Current	2/2x18.6A
Nominal Output Voltage	230 VAC (P-N)/400 VAC (P-P)
Output Voltage Range	184-264.5 VAC* per phase
Nominal Output Current	14.5A per phase
Dimension, D x W x H (mm)	167.5 x 500 x 622
Net weight (kgs)	45
Operating Temperature	-10 to 55 °C



Inverter, AC/DC  
charger or PV charger



Technology protects against short  
circuit



Technology for instant change-  
over between power and battery  
and vice-versa



Technology protects against  
reverse polarity

UPS

INVERTERS

ACCESSORIES

AVR

BATTERIES

SOLAR SOLUTION